

TOOL & EQUIPMENT BULLETIN



TOOL NUMBER: TSN01243-100-A

TITLE: ROTARY RLP77 SCISSOR LIFT

REV, DATE: A, 02-06-2026

Overview


Due to the wheelbase of R2 in relation to the scissor lift platform, special attention is required to safely load and lift the vehicle.



Details:

Follow the guidelines below to safely lift the R2 vehicle on the scissor lift.

1. Park the vehicle over the lift, and raise the rear ramp extension to the flat position. Place the taller rubber blocks at the R2 lift points.

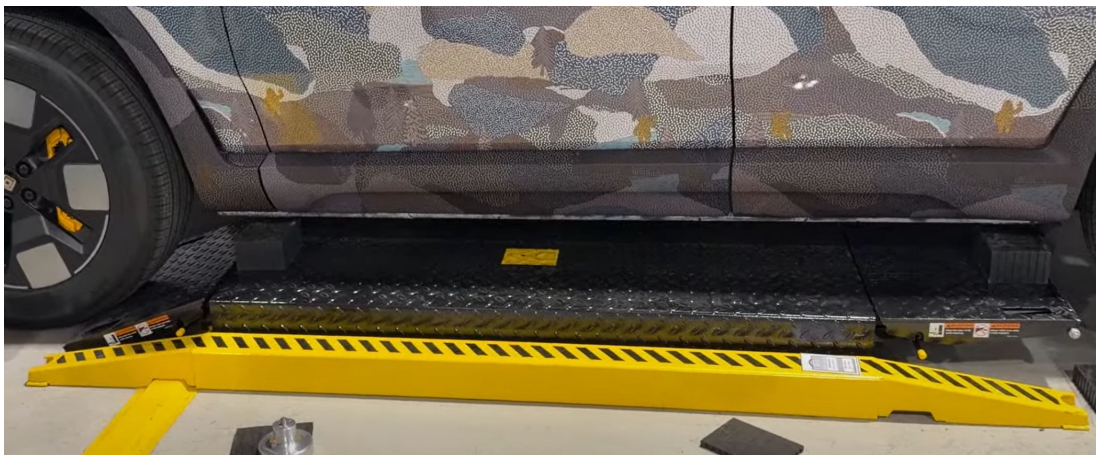

2. Note the position of the vehicle and the front tire in relation to ramp. The vehicle may need to be driven slightly up the ramp and the parking brake engaged in order to hold the vehicle at the proper position where the blocks and vehicle lift points line up.



3. Carefully lift the vehicle. Ensure that the rubber blocks engage well with the lift pad locations on the vehicle.



4. When lowering the vehicle, the front ramp may push the vehicle forward as it levels out towards the ground. Proceed slowly and allow lift and vehicle to lower completely.

