

# TSN000477 LOCKOUT TOOL

## Purpose:

This tool is used to gain access to a vehicle when locked out



## Labor Code:

## General Principles:

Steck Mfg. Big Easy P/N 32955DLX

Use the inflatable wedge to expand a small enough gap between the door and the frame to insert the hook. Rotate the hook to open the door handle

## Tool Operation:

1. Slide the airbag wedge into the top edge of the door frame and begin to inflate.

**⚠ Caution:** Do not over inflate the wedge. This should be inflated a minimal amount to get to the plastic wedge into place in the next step





2. Insert the plastic wedge into the top edge of the door frame taking care not to damage the paint.

Deflate the Air bag wedge and slide it down the door frame edge approx. 2-3”.

**Note:** The bag only needs to be lowered enough to give clearance for the rod to go through the upper corner of the door frame




3. Inflate the bag once again.

**Caution:** Inflate the bag the minimum

**required gap to insert the rod through the upper edge of the door frame. An excessive gap will damage the door frame**



4. Insert the rod diagonally down from the upper corner to hook into the door handle

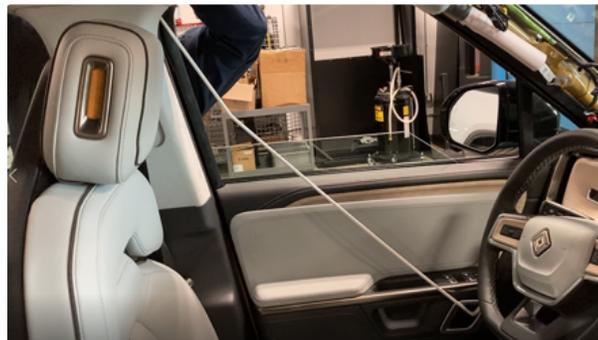

5. Once the hook is engaged with the door handle, rotate the hook to pull the door

handle outward and open  
the door

